




MSP-m *Series*

MSP-m Series Casepacker
High speed packing of shelf-ready cases, trays, and shippers

MSP-m Series

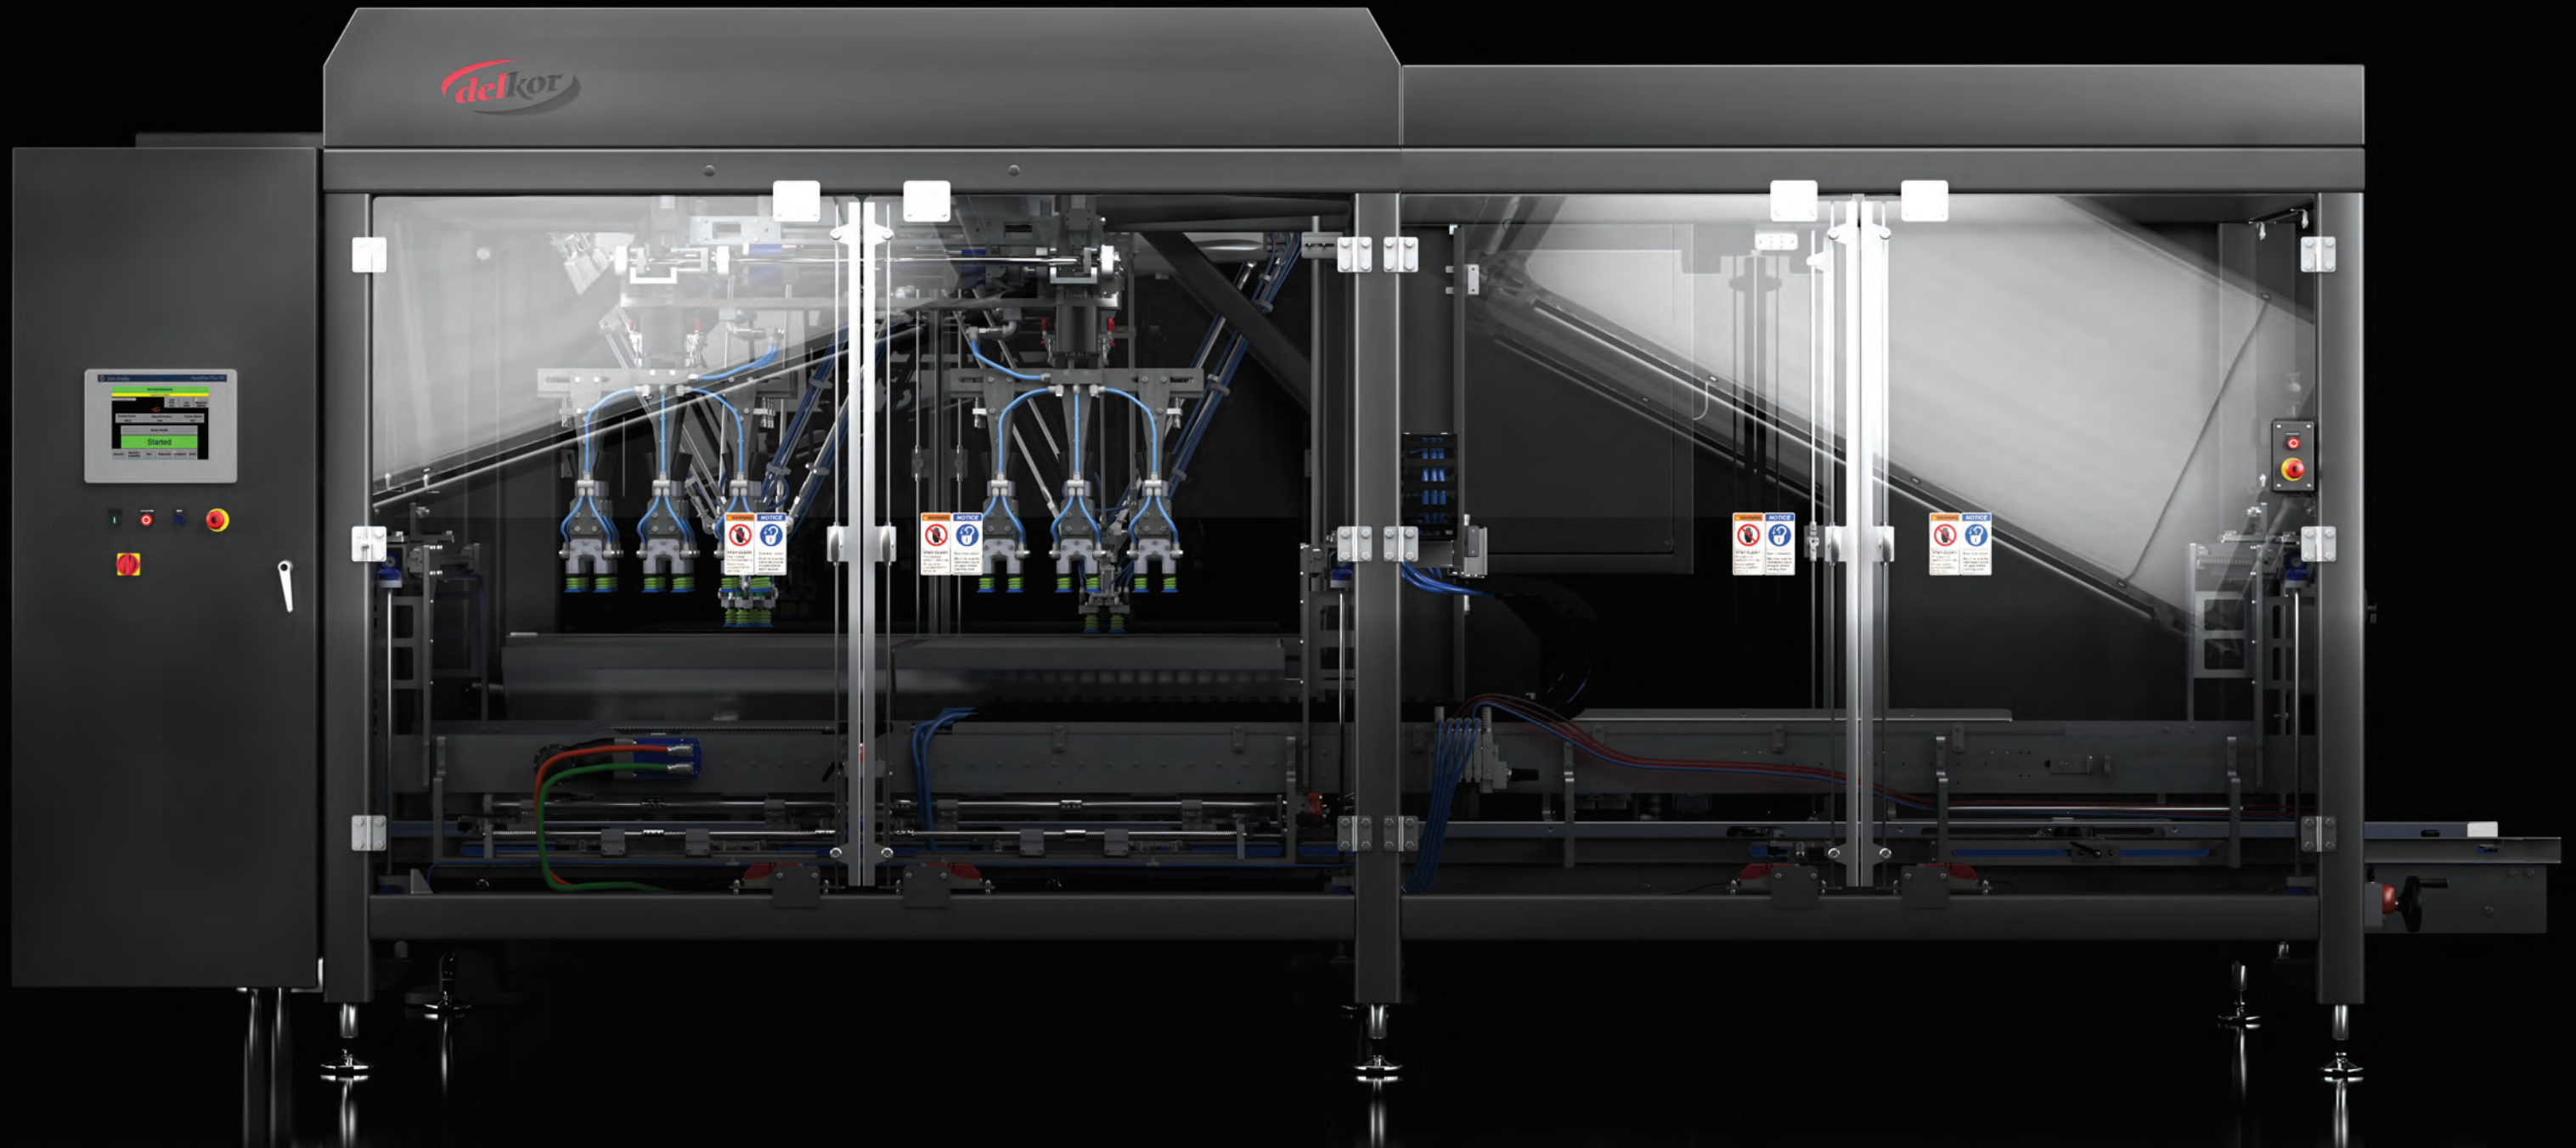

INFEED



Accepts Any Orientation



Packs Bags or Pouches



Holds up to 2 lbs.




Central Vacuum



Speeds up to 200/min


OUTFEED




Cabrio Case® SRP



Shelf-Ready Cases



Club Store Stackable
Trays



Economical Shippers



Speeds up to 50 Cases/min

MSP-m Series



KEY FEATURES

Packs Pouches into SRP's, Standard Shippers, and Display Trays
 Simple Tool-less Changeover
 No Collation Chains/Buckets or Case Index Chains



MACHINE LAYOUT

Right Hand Counter-Flow or Through-Flow
 Left Hand Counter-Flow or Through-Flow



ROBOTICS

Model Fanuc M2iA
 Finish White Painted (Food-Grade)
 Pick Method Vision
 Vacuum System Busch Central Vacuum Blowers



GANTRY

Pick Method Vision
 Vacuum System Busch Central Vacuum Blowers



CONTROL SYSTEM

PLC Allen-Bradley Control Logix
 HMI Allen-Bradley Panelview 1000
 Servo Motors Allen-Bradley MPL or MPF (Food-Grade)
 Safety System Category II or III



ENCLOSURE CONFIGURATIONS

Main Enclosure NEMA 12 or NEMA 4X(SS)
 Fanuc Cabinet NEMA 1, NEMA 12, NEMA 4(SS) or NEMA 4X(SS)
 Camera Enclosure NEMA 12 (Painted), or NEMA 4X(SS) w/ Air Blast
 Panel Cooling Vortex, Heat Exchanger or Air-Conditioner



UTILITIES

Power 480v 60hz 3ph
 Air 20 SCFM @ 80PSIG



DIMENSIONS

Weight 8000 lb (3600 kg)
 Overall Length 16'8" (5080 mm) *Configuration Dependent
 Overall Width 10'6" (3195 mm)
 Overall Height 10' 10" (3300 mm)



MACHINE OPTIONS

Frame Materials Powdercoated Carbon Steel or Stainless Steel
 Reject Bins Stainless Steel Bins on Casters
 Trap Key Provides Secure Access to Machine
 Status Glow Bright Internal LED Status Lights

Please call (800) 328-5558 to discuss custom configurations and applications.

